

HERITAGE®

LAMINATED ASPHALT SHINGLES

PRODUCT DATA



MANUFACTURED IN FREDERICK, MD

HERITAGE® shingles feature a double-layer fiberglass mat construction with a random-cut sawtooth design. The two layers of mat are coated with asphalt and then laminated together and surfaced with mineral granules. Also features a self-sealing strip of asphalt.

USES: For application to roof decks with inclines of not less than 2 inches per foot. For slopes between 2 inches and 4 inches per foot, refer to application instructions for low slope.

- Rustic beauty of wood shakes.
- Shadowtone feature adds dimension, depth of appearance and curb appeal.
- 30-year Limited Warranty, 15-year FULL START, 5-year transferability.
- 15-year Limited Warranty for winds up to 110 mph.**
- 10-year Algae Relief-Algae Cleaning Limited Warranty that provides for cleaning of discoloration caused by certain algae growth that may occur in areas with high humidity.

Shingles begin to age as soon as they are exposed to nature. Buildings experience aging factors differently, so it is difficult to predict how long shingles will last. That's why TAMKO provides a Limited Warranty. Go to TAMKO.com for details or call us at 1-800-641-4691.

CERTIFICATIONS/REPORTS

UL Listed for Class A Fire Rating:	UL 790/ASTM E 108, Class A
UL Classified for Wind Resistance:	ASTM D 7158, Class H and ASTM D 3161, Class F
UL Classified in accordance with:	ASTM D 3462 and ICC-ES Acceptance Criteria AC438
UL Evaluation Reports:	UL ER2919-01 and UL ER2919-02
Florida Building Code Approved:	FL 1956
Miami Dade County Florida Approved:	NOA 14-0306.02 Expiration Date 12/01/2015

COLORS

AMERICA'S NATURAL COLORS


- Autumn Brown
- Black Walnut
- Natural Timber
- Thunderstorm Grey

CLASSIC HERITAGE COLORS

- Aged Wood
- Olde English Pewter
- Oxford Grey
- Rustic Black
- Rustic Cedar
- Rustic Evergreen
- Rustic Redwood
- Rustic Slate
- Slatetone Grey
- Virginia Slate
- Weathered Wood

PRODUCT DATA*

Shingle size	13-1/4" x 39-3/8"
Exposure	5-5/8"
Coverage per Sales Square	98.4 sq.ft.
Shingles per Sales Square	64
Bundles per Sales Square	3

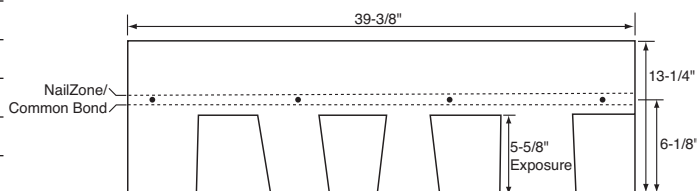

* All values stated as nominal

** 130 mph when applied in accordance with TAMKO's High Wind Application instructions.

CAUTION: This product contains crystalline silica and formaldehyde. Crystalline silica and formaldehyde have been classified as "known" human carcinogens by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains oxidized asphalt. Occupational exposures to oxidized asphalt and its emissions during roofing have been classified by IARC as a "probable human carcinogen". Oxidized asphalt also contains Polycyclic Aromatic Hydrocarbons some of which have been classified by IARC as known or probable human carcinogens. The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.



TAMKO®

BUILDING PRODUCTS

TAMKO Logo, Heritage®, and TAMKO® are registered trademarks, and the Heritage Roofer Logo is a trademark of TAMKO® Building Products, Inc.

Central District	220 West 4th St.	Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr.	Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St.	Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp.	Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave.	Denver, CO	80216	800-530-8868